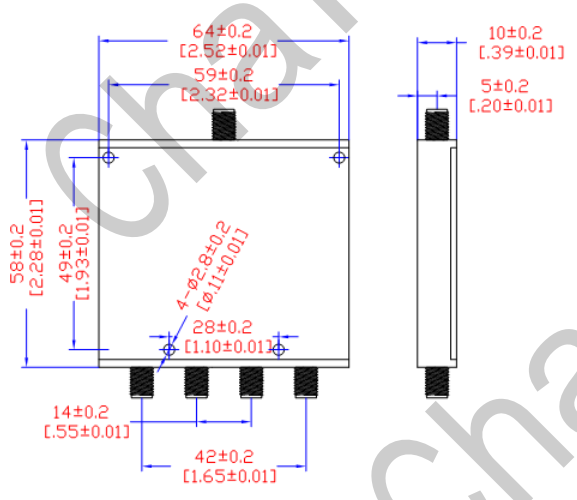


Power Divider 功分器

产品名称	CLP-2-8-4Way PD		
外观示意图:	 <p>Technical drawing showing dimensions for the CLP-2-8-4Way PD power divider. Dimensions are provided in millimeters (mm) and inches (in).</p> <ul style="list-style-type: none"> Top view dimensions: 64±0.2 [2.52±0.01], 59±0.2 [2.32±0.01], 58±0.2 [2.28±0.01], 49±0.2 [1.93±0.01], 28±0.2 [1.10±0.01], 14±0.2 [0.55±0.01], 42±0.2 [1.65±0.01]. Side view dimensions: 10±0.2 [0.39±0.01], 5±0.2 [0.20±0.01]. Other dimensions: 4-φ2.8±0.2 [φ0.11±0.01]. 		
性能指标			
测试要求	每个100%测试, 随货附驻波测试数据		
项目	指标	项目	指标
特性阻抗	50Ω	接头类型	SMA(F)
频率范围	2~8GHz	相位平衡	≤±5°
电压驻波比	≤1.45:1	幅度平衡	≤±0.5dB
插损	≤1.2dB(不包含理论6dB)	温度范围	-40°C~+70°C
隔离度	≥18dB	承受功率	10W/2W
包装存储		其它	
<p>产品存储条件为: -10°C~+40°C, 相对湿度不大于80%, 周围空气无酸性、碱性等腐蚀性气体的库房中。</p>		<p>公司产品可接受个性化订制 (接头类型和频率等) 想了解公司其他产品请登录: www.clpe.com.cn 官网。</p>	